

T55

APPLICATIONS

Domestic and commercial sites requiring insulation and sound proofing.

This shutter type is also available as a high-performance remote-controlled garage door (see Datasheet 02, 'Compact Garage Door').

CURTAIN SLAT

Aluminium double skinned aluminium polyester powder-coated slat with polyurethane foam insulating core.

Finish: White, Silver, Grey, Cream White, Beige, Ivory, Duck Egg Blue, Blue, Red, Chartwell Green, Fir Green, Moss Green, Anthracite, Brown, Black, Painted Golden Oak or Painted Rosewood as standard. Sage Green available on request (extended lead time applies). Powder coating and wood laminate finishes available on request.

Visible Face: 55mm
Weight per m²: 4kg
Maximum Width: 3500mm
Maximum Area: 10m²
Slat U-Value: 2.9 W/m² K

ENCLOSURE

Roll-formed aluminium enclosure with pressure-moulded aluminium end plates.

Finish: White or brown. Option to powder coat any RAL / BS colour (surcharge applies).

Guide Height (mm)	Plate Size (mm)
1235	165
1520	180
2195	205
2650	250
3500	300

Plate sizes shown as a guide only and may vary.

BOTTOM SLAT

Extruded aluminium bottom slat with rubber weather seal.

GUIDE CHANNELS

Extruded aluminium guide channels with brush inserts. Width of 66mm.


Finish: White or brown. Option to powder coat any RAL / BS colour (surcharge applies).

OPERATION

Electric: Somfy tubular motor & internal rocker or external key switch as standard. Safety brake as appropriate to comply with legislation. Manual override facility & crank handle as required (surcharge applies). Numerous control option variants such as group, remote or mobile phone activation.


Note: Manual operation by spring and lock is available but not common for the T55 profile.

CE compliant to all applicable directives and standards.

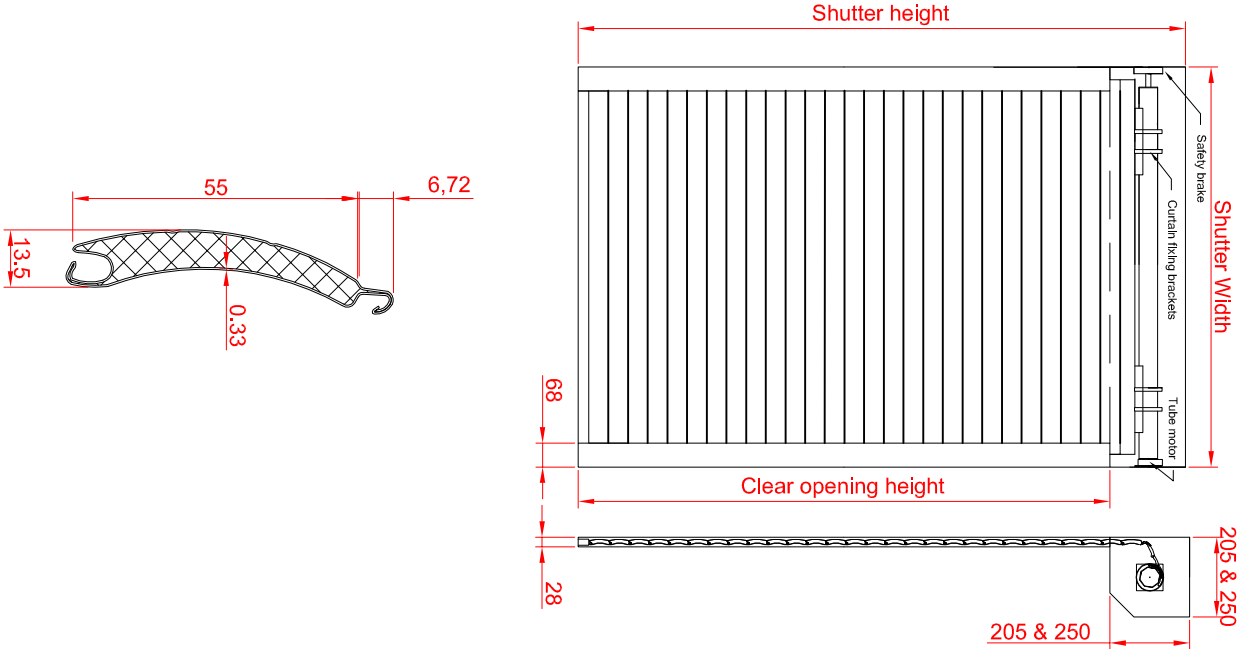


Face Fix

Plan View

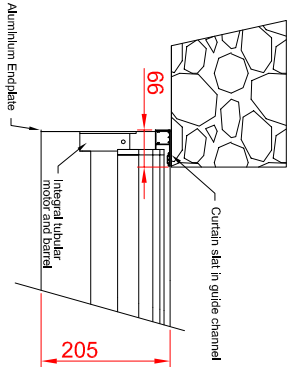

Reveal Fix

Plan View

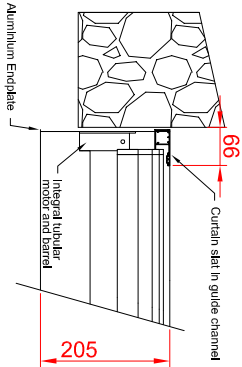

SHUTTER DESIGN & INSTALLATION

23 Tarvin Road, Chester, CH3 5DJ
www.sdinstall.co.uk; enquiry@sdinstall.co.uk