

# Elite Garage Door

## APPLICATIONS

The Elite Garage Door is recommended for residential applications requiring insulation and sound proofing, as well as Secured by Design approval or a tested security rating. The door is formed from 77mm insulated slats in a range of colours, and rolls into a small aluminium housing. Remote control operation by radio frequency rolling code key fobs, courtesy light, safety features, and manual override all as standard. Suitable for internal face fix only. (Certification information: LPS 1175-6.0, certificate 931, Aluroil Ltd).

## CURTAIN SLAT

Aluminium double skinned aluminium polyester powder-coated slat with polyurethane foam insulating core.

Finish: White, Silver, Grey, Cream White, Beige, Ivory, Duck Egg Blue, Blue, Red, Chartwell Green, Fir Green, Moss Green, Anthracite, Brown, Black, Painted Golden Oak or Painted Rosewood as standard. Powder coating and wood laminate finishes available on request.

Visible Face: 77mm  
Weight per m<sup>2</sup>: 5.5kg  
Maximum Width: 5300mm  
Maximum Area: 16m<sup>2</sup>  
Slat U-Value: 5 W/m<sup>2</sup> K

## ENCLOSURE

Roll-formed aluminium enclosure with pressure-moulded aluminium end plates.

Finish: White or brown. Option to powder coat any RAL / BS colour (surcharge applies).

Guide Height (mm)	Plate Size (mm)
2600	300
4500	360
5500	400

Plate sizes shown as a guide only and may vary.

## BOTTOM SLAT

Extruded aluminium bottom slat with rubber weather seal.

## GUIDE CHANNELS



Extruded aluminium guide channels with brush inserts. Width of 150mm.

Finish: White or brown. Option to powder coat any RAL / BS colour (surcharge applies).



## OPERATION

Electric: Somfy tubular motor & internal rocker or external key switch as standard. Safety brake as appropriate to comply with legislation. Manual override facility & crank handle as required (surcharge applies). Numerous control option variants such as group, remote or mobile phone activation.

CE compliant to all applicable directives and standards.

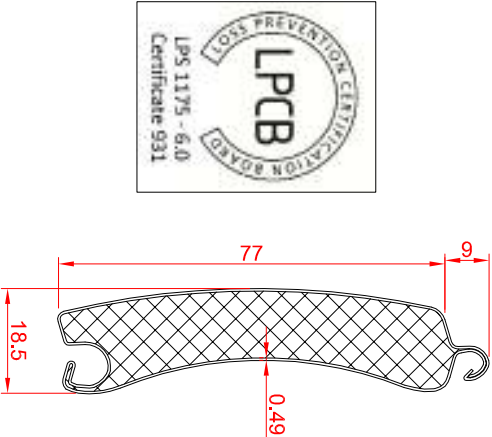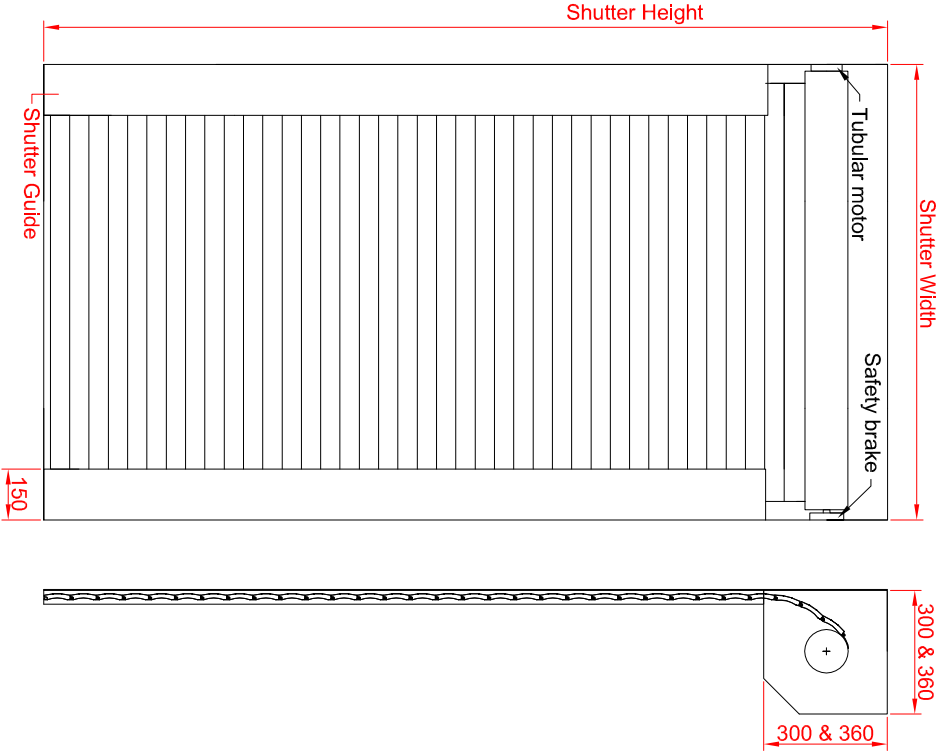

Face Fix  
The T77 Elite must be face-fixed, either to brick, block, steel section, or aluminium box section. Approved fixings and installation instructions are supplied with the shutter.

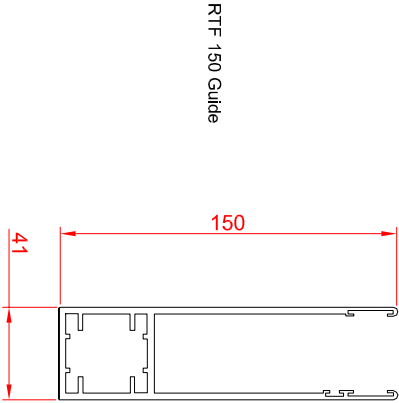

## SHUTTER DESIGN & INSTALLATION

23 Tarvin Road, Chester, CH3 5DU  
www.sdinstall.co.uk; enquiry@sdinstall.co.uk