

Eurolook

APPLICATIONS

Medium security commercial sites where see-through vision is a priority. Tested by SKG to ENV 1627-16390 standard with Class 3 security rating. Fire tested to BS 476:Part 7 (1997), Class 1 rating.

CURTAIN LINKS

Synthetic links of polycarbonate built in a brick formation as standard, enabling 83% transparency and 92% daylight transmission. UV-stabilised, it does not discolour or yellow. Eurolook Standard bends while effectively resisting cracking or breaking.

Finish: Transparent polycarbonate. Available in frosted and ventilated variants.

Visible Face:

85mm
108mm

Weight per m²:

9kg
12000mm (outboard motor)

Maximum Width:

7000mm (tubular motor)

Maximum Area:

29m² (tubular motor)
72m² (outboard motor, internal fit)
50m² (outboard motor, external fit)

CASING

Not included as standard. Galvanised steel casing available (surcharge applies), with option to powder coat any RAL / BS colour.

Guide Height (mm)	Plate Size (mm)	Motor
2750	305	Tubular
4000	355	Tubular
4500	400	Tubular
5000	400	Outboard
6000	450	Outboard
7000	550	Outboard

Plate sizes shown as a guide only and may vary.

BOTTOM SLAT

Extruded aluminium bottom slat with EPDM weather seal.

Finish: Anodised aluminium as standard, powder coating available on request.

GUIDE CHANNELS


Extruded aluminium with a PVC weather seal. Guide channel width of 80mm or 115mm, including PVC seal strip. Guide channels are either bolted onto angle or box section, or fixed directly to the opening, depending on the application.

Finish: Mill aluminium finish as standard, powder coating available on request.

OPERATION

Electric: Single-phase tubular motor with internal rocker or external key switch. Numerous options such as group or remote control etc., available as required. Manual override facility as required.

CE Compliant to all applicable directives and regulations.

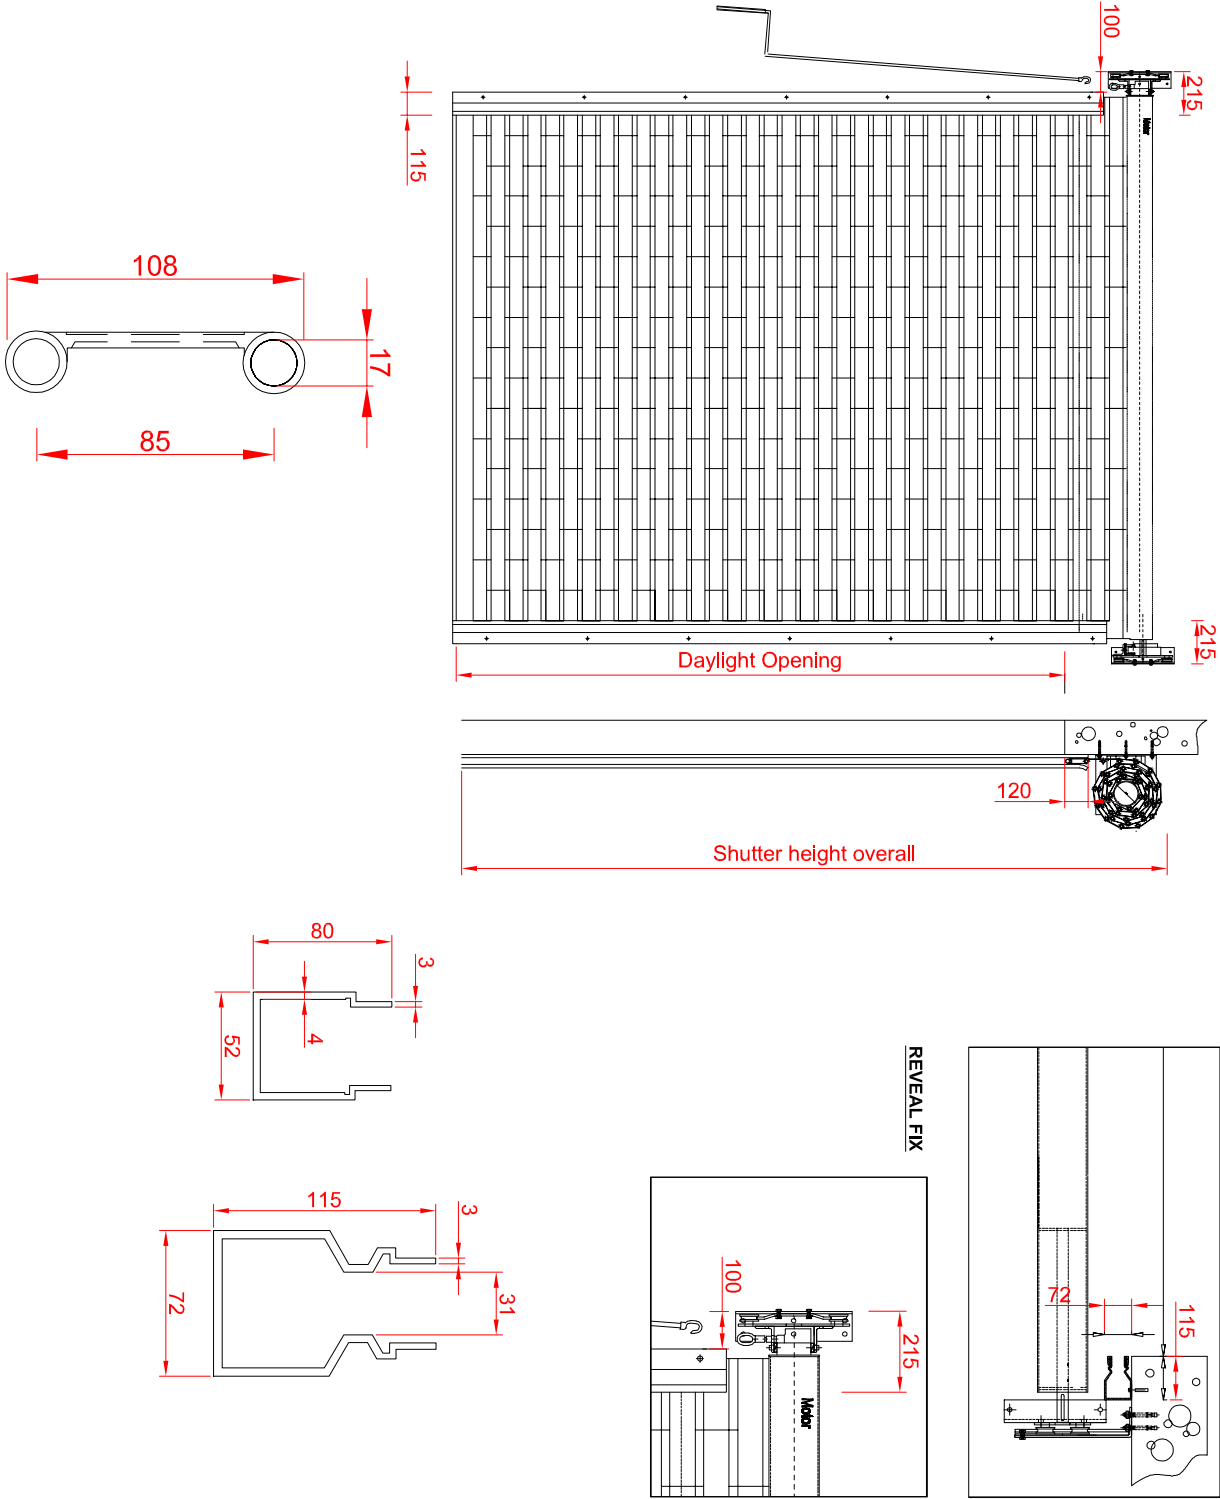

SHUTTER DESIGN & INSTALLATION

23 Tarvin Road, Chester, CH3 5DJ
www.sdininstall.co.uk; enquiry@sdinstall.co.uk